

BasIP Entrance Panel

BI-02/04/08/12FBI

Specifications

Panel type:

Multi-apartment

Keyboard:

Backlight mechanical buttons

Induction Loop Output:

Yes

Status indicator

Calling, Talking, Lock-release

Camera:

1/3"

Resolution:

2 Mpx

Camera angle:

90° (horizontal)

Output video:

Full HD (1920 × 1080), H.264 Main Profile

Night backlight:

6 LEDs

Light sensitivity:

0.01 LuX

Protection class: IP65

IK-Code: IK08

Working temperature:

-40 — +65 °C

Power consumption:

6.5 W, in standby — 3.6 W

Power supply:

+12 V DC, PoE

Body: Aluminum

Colors:

Black / Silver / Gold

Size of the pane:

156 × 370 × 50 mm

Dimensions for installation:

142 × 358 × 58 mm


Installation:

Flush, surface with BR-AA12 bracket

Overview

The multi-apartment outdoor panel features a stylish design and is available in silver. It is equipped with three LED indicators to display panel status and includes an output for connecting an induction loop for the hearing impaired.

The panel allows visitors to call individual units or the concierge directly, providing a convenient intercom solution for multi-unit properties.

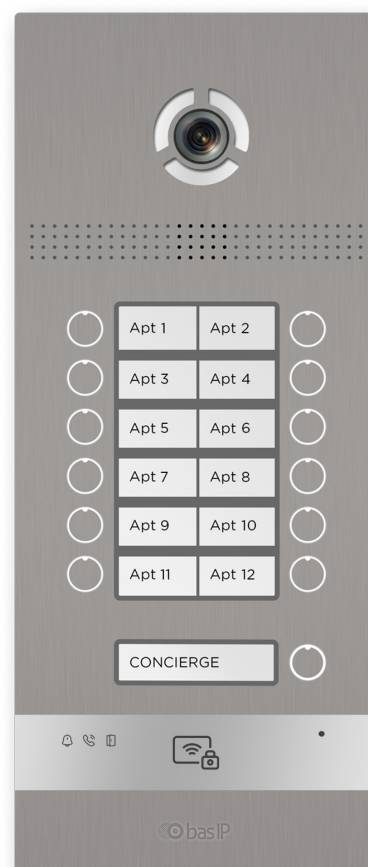

Main Features



Camera resolution
2.0 MP



Working temperature
-40 — +65 °C



Keypad backlit
mechanical buttons



Fault alert



Concierge calling



Automatic
configuration



Flexible system setup



Log all events




Protection class IP65



Open API

Color Variants

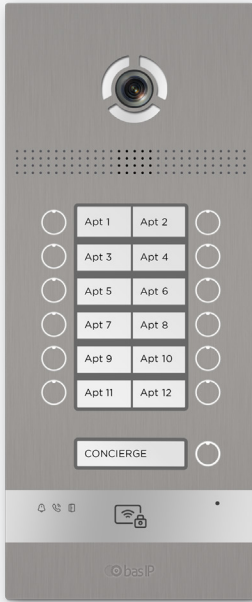

SILVER

Functional capabilities

Interface:

Multi-language graphical and WEB interface

Identifiers in the panel memory (QR codes, cards, key fobs):
20,000

Integration with ACS:

Wiegand

Built-in Wiegand output for card, and key fob:

26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits

Output for connecting an external induction loop for the hearing impaired:

Low-frequency Audio signal 1.2V; 8.2 kOhm.

Type of output for connecting an external induction loop:

Socket (female) TRS

Shortcut buttons:

Concierge button

Number of call melodies:

4 polyphonic melodies, ability to customize melodies for different actions


Authentication:

Separate password for settings, WEB – interface and RTSP stream

Additionally:

Software Link support, SIP P2P, Built-in relay, Proximity sensor, Open API, Hermetic back cover

Flush Mounting

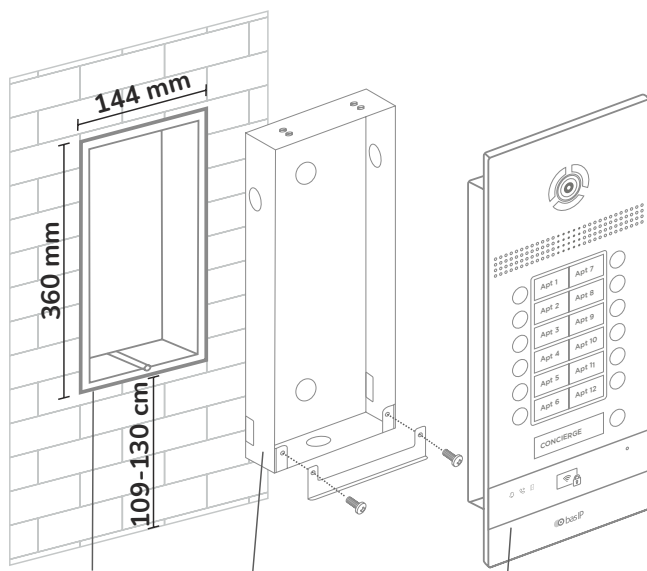


Niche

Flush Bracket

Outdoor Panel

Surface Mounting

(with BR-AA12)

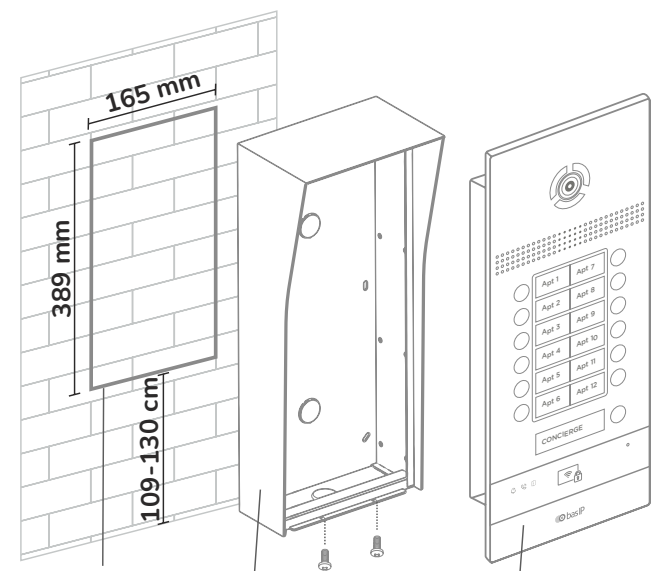

Mounting area

Surface Bracket
with Sun & Rain Cover

Outdoor Panel